

AD 660

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	660,00	528,00	611,00	488,00	881,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z'5J F

TRANSFER SWITCH

AD 660

Doosan
Mecc Alte
D+' &'

1

Manufacturer		Doosan		
Model		P222LE		
		%\$\$' "# "		
)+(Z\$\$' "		
		G* - Z\$\$<DQ		
	L	21,930		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	40,00	
		L	113,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	38,00		
	' # "	650,00		
fl ' # ı	' # "	117,50		
	° C	580,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "			
		134,00	97,60	65,80

2

		Mecc Alte		
		ECO 40-1,5L/4		
	Hz	50		
	"	620,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	894,00		
Temperature		H		

3

		fl ı		fl ı	
	"	"	"	"	L
AD 660	4010,00	3470,00	1550,00	2157,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	5565	5297	1606	2656	1000

AD 660

Doosan
Mecc Alte
D+' &''



f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#



#

6G'9B '*\$-\$)'\$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L



GA 8

!&+''''

%, !&*(

&(\$)


ž

ž

ž

AD 660

Doosan
Mecc Alte
D+' &'

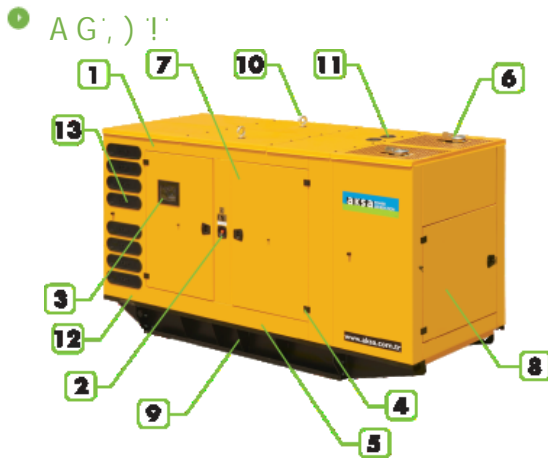

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000